

factory certificate



product: Twin – end-sleeves, insulated
suitable for two conductors

surface: tin plated: 3 - 5 µm

insulation: polypropylene (heat resistant up to 110°C)

art-number: A 261082 – A 269142


norm: TM colour-code

material: Cu-ETP acc. to EN 13600

information: RoHS-conform (EU-Direktive 2002/95/EC)

Eisenacher
quality management



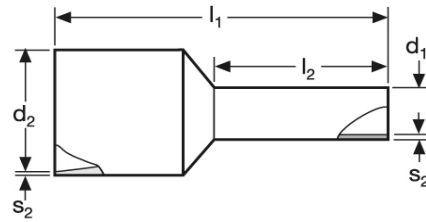

Cord end-sleeves

mm ²	TM		AWG	nominal size	dimensions						~kg 1000 St.	VE	
	colour-code	art-number			l1	l2	d1	s1	d2	s2			
0,50	N	white	A 261082	20,0	0,50 - 8	15,0	8,0	1,5	0,2	2,5	4,7	0,106	500
0,75	K	blue	A 262062	18,0	0,75 - 6	13,0	6,0	1,8	0,2	2,8	5,0	0,116	500
	N		A 262082		0,75 - 8	15,0	8,0	1,8	0,2	2,8	5,0	0,125	500
	L		A 262102		0,75 - 10	17,0	10,0	1,8	0,2	2,8	5,0	0,140	500
1,00	N	red	A 263082	17,0	1,00 - 8	15,0	8,0	2,0	0,2	3,4	5,4	0,143	500
	L		A 263102		1,00 - 10	17,0	10,0	2,0	0,2	3,4	5,4	0,166	500
1,50	N	black	A 264082	15,0	1,50 - 8	16,0	8,0	2,3	0,2	3,6	6,6	0,174	500
	L		A 264102		1,50 - 12	20,0	12,0	2,3	0,2	3,6	6,6	0,211	250
2,50	N	grey	A 265102	13,0	2,50 - 10	18,5	10,0	2,9	0,2	4,2	7,8	0,307	250
	L		A 265132		2,50 - 13	21,5	13,0	2,9	0,2	4,2	7,8	0,352	250
	XL		A 265182		2,50 - 18	27,0	18,0	2,9	0,2	4,2	7,8	0,461	250
4	N	orange	A 266122	11,0	4 - 12	23,0	12,0	3,8	0,2	4,9	8,8	0,481	100
	L		A 266182		4 - 18	29,0	18,0	3,8	0,2	4,9	8,8	0,722	100
6	N	green	A 267142	10,0	6 - 14	25,0	14,0	4,9	0,2	5,9	10,0	0,637	100
	L		A 267182		6 - 18	27,0	18,0	4,9	0,2	5,9	10,0	0,819	100
10	N	brown	A 268142	7,0	10 - 14	26,0	14,0	6,5	0,2	7,2	13,0	0,856	100
16	N	white	A 269142	5,0	16 - 14	30,0	14,0	8,3	0,2	9,6	18,4	1,221	50