

factory certificate




product: solderless terminals, fork type
insulation: PA or PVC (3 KV 50 Hz or 2 KV 400 Hz)
art-number: K 403920.. – K 406760 N
norm: DIN 46237
material: galv. Sn, Cu-ETP
(Cu-ETP acc. to EN 13600)
information: RoHS-conform (EU-Direktive 2002/95/EC)
The colour of the insulation sleeve matches
the colour of the diameter range

Eisenacher
quality management



Solderless terminals

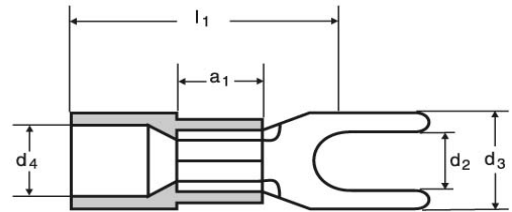

mm ²	colour	AWG	nominal size	art-number	order code	dimensions (mm)						~kg 1000 St.	VE
						d2	d3	d4	l1	a1	s		
0,1 – 0,5	yellow	20	2 – 0,5	K 403920	..	2,2	5,0	3,2	16,0	5,0	0,5	0,200	1.000
			3 – 0,5	K 403930	..	3,2	5,0	3,2	16,0	5,0	0,5	0,200	1.000
			3,5 – 0,5	K 403935	..	3,7	6,0	3,2	16,0	5,0	0,5	0,250	1.000
			4 – 0,5	K 403940	..	4,3	6,0	3,2	17,0	5,0	0,5	0,250	1.000
			5 – 0,5	K 403950	..	5,3	6,0	3,2	18,0	5,0	0,5	0,250	1.000
0,5 – 1,5	red	17	3 – 1	K 404030	..	3,2	5,8	4,1	16,0	5,0	0,8	0,650	1.000
			3,5 – 1	K 404035	..	3,7	6,0	4,1	16,0	5,0	0,8	0,750	1.000
			4 – 1 S	K 404040	..	4,3	6,7	4,1	17,0	5,0	0,8	0,650	1.000
			4 – 1 N	K 404041	..	4,3	7,1	4,1	17,0	5,0	0,8	0,700	1.000
			4 – 1 B	K 404042	..	4,3	8,0	4,1	17,0	5,0	0,8	0,750	1.000
			5 – 1	K 404050	..	5,3	9,6	4,1	18,0	5,0	0,8	0,950	1.000
			6 – 1	K 404060	..	6,4	10,7	4,1	18,0	5,0	0,8	0,950	1.000
			8 – 1	K 404080	..	8,4	14,0	4,1	19,0	5,0	0,8	1,200	1.000
1,5 – 2,5	blue	13	3 – 2,5	K 405030	..	3,2	6,4	4,6	17,0	5,0	0,8	0,660	1.000
			3,5 – 2,5	K 405035	..	3,7	6,4	4,6	18,0	5,0	0,8	0,700	1.000
			4 – 2,5 S	K 405040	..	4,3	6,4	4,6	19,0	5,0	0,8	0,900	1.000
			4 – 2,5 N	K 405041	..	4,3	7,0	4,6	19,0	5,0	0,8	0,900	1.000
			4 – 2,5 B	K 405042	..	4,3	10,0	4,6	19,0	5,0	0,8	0,900	1.000
			5 – 2,5	K 405050	..	5,3	8,0	4,6	19,0	5,0	0,8	1,100	1.000
			6 – 2,5	K 405060	..	6,4	12,0	4,6	20,0	5,0	0,8	1,200	1.000
			8 – 2,5	K 405080	..	8,4	14,0	4,6	22,0	5,0	0,8	1,400	1.000
2,5 – 6	yellow	10	3,5 – 6	K 406035	..	3,7	8,0	6,6	22,0	6,0	1,0	1,600	500
			4 – 6	K 406040	..	4,3	8,0	6,6	22,0	6,0	1,0	1,700	500
			5 – 6	K 406050	..	5,3	9,0	6,6	22,0	6,0	1,0	1,850	500
			6 – 6	K 406060	..	6,5	11,0	6,6	24,0	6,0	1,0	1,900	500
			8 – 6	K 406080	..	8,4	15,0	6,6	27,0	6,0	1,0	2,250	500
			10 – 6	K 406100	..	10,5	18,0	6,6	28,0	6,0	1,0	3,000	500
6 – 10	red	7	5 – 10	K 406550	N	5,3	10,5	7,5	17,0	8,0	0,8	2,600	100
			6 – 10	K 406560	N	6,5	10,5	7,5	17,0	8,0	0,8	2,500	100
10 – 16	blue	5	5 – 16	K 406650	N	5,3	11,0	8,0	20,0	10,0	0,8	4,900	100
			6 – 16	K 406660	N	6,5	11,0	8,0	20,0	10,0	0,8	4,900	100
16 – 25	yellow	3	5 – 25	K 406750	N	5,3	12,0	10,0	25,0	11,0	0,8	7,500	100
			6 – 25	K 406760	N	6,5	12,0	10,0	25,0	11,0	0,8	7,400	100
Nylon transparent easy entry					N	0,1 – 150 mm ²							
DIN Nylon easy entry					D	0,1 – 6 mm ²							
AWG Nylon easy entry					I	17,0 – 10 mm ²							
AWG PVC					T	17,0 – 10 mm ²							