

# factory certificate



product: bullet male, fully insulated  
easy entry with copper sleeve

insulation: PA ( 3 KV 50 Hz or 2 KV 400 Hz )


art-number: K 4243005 N – K 4245060 N

material: galv. Sn, CuZn and Cu-ETP  
(Cu-ETP acc. to EN 13600)

information: RoHS-conform (EU-Direktive 2002/95/EC)  
The colour of the insulation sleeve  
matches the colour of the diameter range

Eisenacher  
quality management



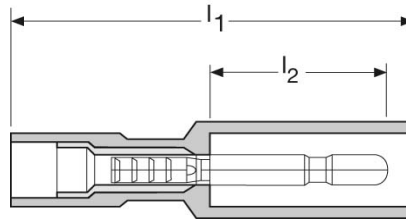

**bullet male – fully insulated**

mm <sup>2</sup>	colour	AWG	for connector Ø	art-number	dimensions			~kg 1000 St.	VE
					l1	l2	s		
0,2 – 0,5	transp.	20	2,0	K 4243005 N	24,5	13,5	0,30	0,790	1.000
0,5 – 1,5	red	17	4,0	K 4243010 N	24,9	14,6	0,40	1,320	1.000
1,5 – 2,5	blue	13	4,0	K 4244020 N	25,0	14,7	0,40	1,430	1.000
			5,0	K 4244021 N	25,0	14,7	0,40	1,570	1.000
2,5 – 6,0	yellow	10	5,0	K 4245060 N	27,6	14,7	0,40	1,610	500