

factory certificate



product: ring terminals
with heat shrinking tube insulation

insulation: polyolefine with inner liner

art-number: K 401040 HS – K 403110 HS

shrinking temp.: 125°C


dielectric strength.: 20 kV / mm

material: galv. Sn, Cu-ETP
(Cu-ETP acc. to EN 13600)

information: RoHS-conform (EU-Direktive 2002/95/EC)
The colour of the insulation sleeve
matches the colour of the diameter range

Eisenacher
quality management



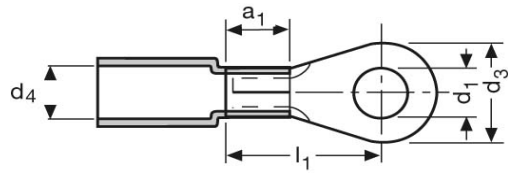

ring terminals

mm ²	colour	AWG	nominal size	art-number	dimensions						~kg 1000 St.	VE
					d1	d3	d4	l1	a1	s		
0,5 – 1,5	red	17	4 – 1,5	K 401040 HS	4,3	7,9	4,6	12,0	4,0	0,7	0,750	1.000
			5 – 1,5	K 401050 HS	5,3	7,9	4,6	13,0	4,0	0,7	0,950	1.000
			6 – 1,5	K 401060 HS	6,4	10,0	4,6	13,0	4,0	0,7	0,880	1.000
			8 – 1,5	K 401080 HS	8,4	11,5	4,6	17,0	4,0	0,7	1,300	1.000
			10 – 1,5	K 401110 HS	10,5	13,5	4,6	17,0	4,0	0,7	1,300	1.000
1,5 – 2,5	blue	13	4 – 2,5	K 402040 HS	4,3	8,4	5,4	12,0	4,0	0,7	0,950	1.000
			5 – 2,5	K 402050 HS	5,3	9,4	5,4	14,0	4,0	0,7	1,100	1.000
			6 – 2,5	K 402060 HS	6,4	11,9	5,4	16,0	4,0	0,7	1,200	1.000
			8 – 2,5	K 402080 HS	8,4	12,0	5,4	17,0	4,0	0,7	1,450	1.000
			10 – 2,5	K 402110 HS	10,5	13,5	5,4	17,0	4,0	0,7	1,900	1.000
2,5 – 6	yellow	10	4 – 6	K 403040 HS	4,3	9,4	6,5	14,0	6,0	0,7	1,700	500
			5 – 6	K 403050 HS	5,3	9,4	6,5	15,0	6,0	0,7	1,800	500
			6 – 6	K 403060 HS	6,4	11,9	6,5	16,0	6,0	0,7	1,900	500
			8 – 6	K 403080 HS	8,4	13,1	6,5	19,0	6,0	0,7	2,400	500
			10 – 6	K 403110 HS	10,5	14,9	6,5	21,0	6,0	0,7	3,000	500