





## Aderendhülsen für Leiter mit verstärkter Isolation 0,34 mm<sup>2</sup> L





Material	Isolation	
E-Cu, gal. Sn	PP	500

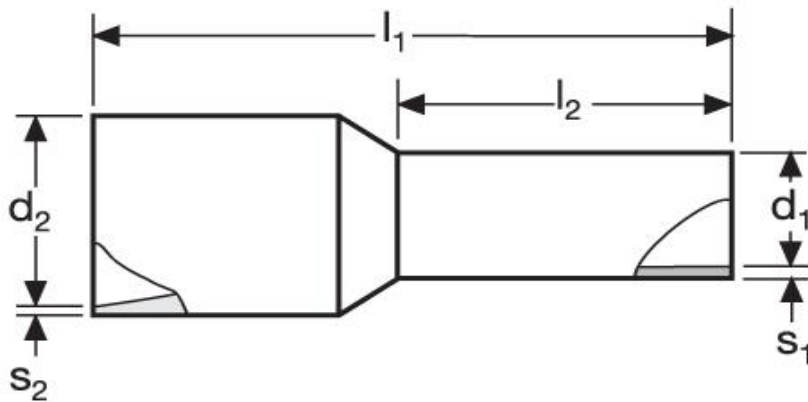

	$l_1$	$l_2$	$d_1$	$s_1$	
in mm:	12,0	8,0	0,85	0,15	
	$d_2$	$s_2$	WE	TM	DIN
	2,6	0,25	A 20208-GB	-	A 20218-GB
			türkis		pink
					

Stand: 22.01.2019

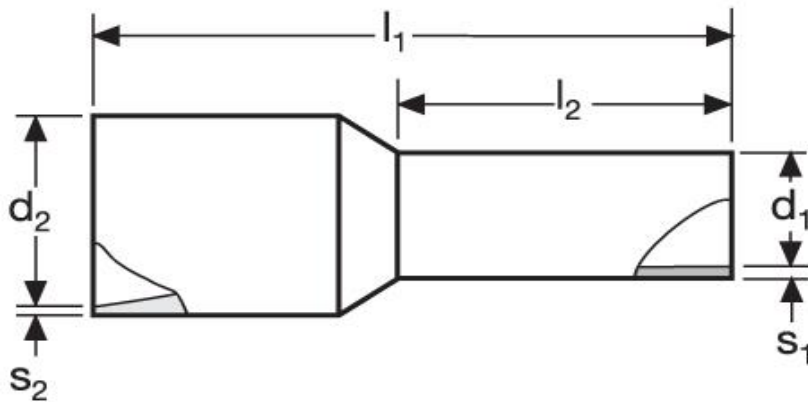**Cord end - sleeves**  
for tri-rated cables  
0,34 mm<sup>2</sup> L



material	insulation	
E-Cu, gal. Sn	PP	500

	$l_1$	$l_2$	$d_1$	$s_1$	
in mm:	12,0	8,0	0,85	0,15	
	$d_2$	$s_2$	WE	TM	DIN
	2,6	0,25	A 20208-GB	-	A 20218-GB
			turquoise		pink
					

date: 22.01.2019