


## Aderendhülsen 0,5 mm<sup>2</sup> K

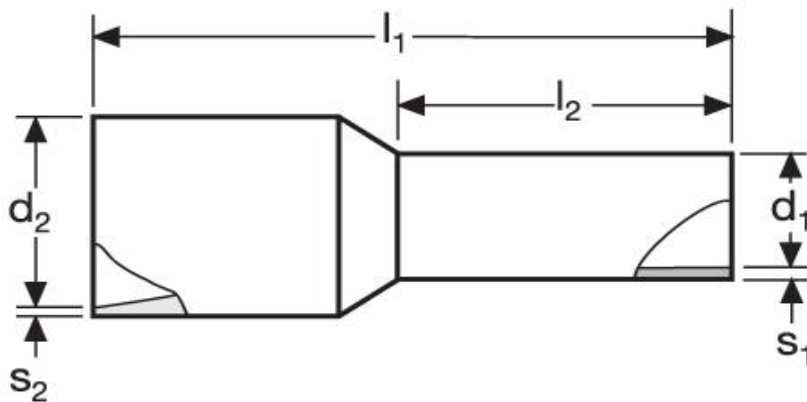

	Material	Isolation			
	E-Cu, gal. Sn	PP	0,068 / 1000	500	
	$l_1$	$l_2$	$d_1$	$s_1$	
in mm:	12	6	1,0	0,15	
	$d_2$	$s_2$	WE	TM	DIN
	2,6	0,25	A20306M2	A22306M2	A24106M2
			orange	weiß	weiß

Stand: 15.01.2019

## Cord end - sleeves 0,5 mm<sup>2</sup> K



	material	insulation		
	E-Cu, gal. Sn	PP	0,068 / 1000	500
	l <sub>1</sub>	l <sub>2</sub>	d <sub>1</sub>	s <sub>1</sub>
in mm:	12	6,0	1,0	0,15
	WE	TM	DIN	
d <sub>2</sub>	A20306M2	A22306M2	A24106M2	
s <sub>2</sub>	orange	white	white	

date: 15.01.2019