

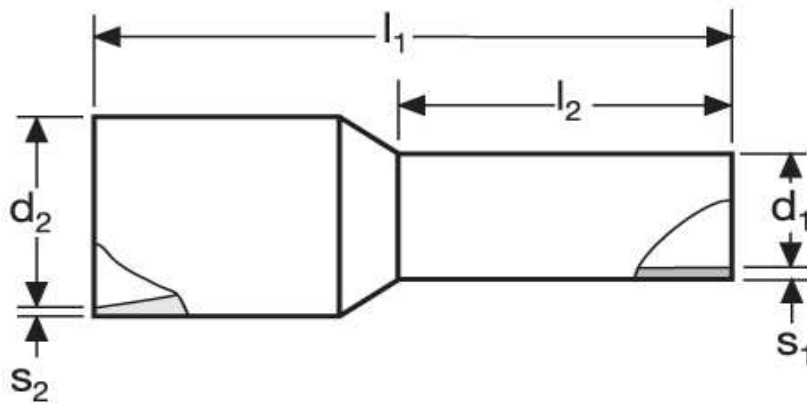


Aderendhülsen 0,75 mm² K

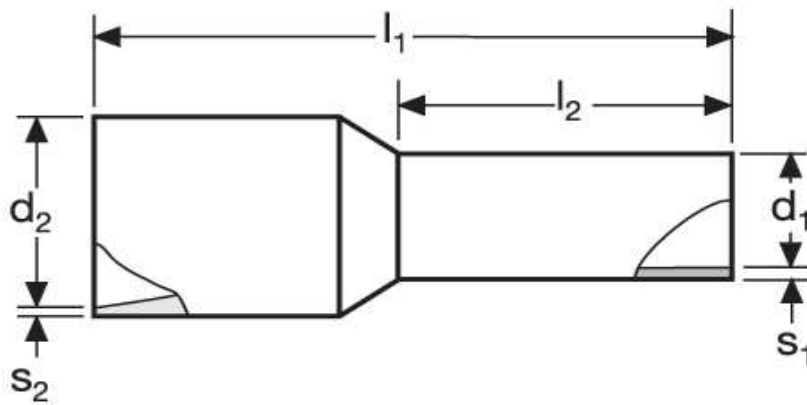

	<table border="1"> <tr> <th>Material</th> <th>Isolation</th> <th></th> <th></th> </tr> <tr> <td>E-Cu, gal. Sn</td> <td>PA</td> <td>0,084 / 1000</td> <td>500</td> </tr> </table>				Material	Isolation			E-Cu, gal. Sn	PA	0,084 / 1000	500	Stand: 09.07.2014												
Material	Isolation																								
E-Cu, gal. Sn	PA	0,084 / 1000	500																						
	<table border="1"> <tr> <th>l_1</th> <th>l_2</th> <th>d_1</th> <th>s_1</th> </tr> <tr> <td>in mm: 12,0</td> <td>6,0</td> <td>1,2</td> <td>0,15</td> </tr> </table>				l_1	l_2	d_1	s_1	in mm: 12,0	6,0	1,2	0,15													
l_1	l_2	d_1	s_1																						
in mm: 12,0	6,0	1,2	0,15																						
	<table border="1"> <tr> <th colspan="2"></th> <th>WE</th> <th>TM</th> <th>DIN</th> </tr> <tr> <th>d_2</th> <th>s_2</th> <td>A 20406</td> <td>A 22406</td> <td>A 24206</td> </tr> <tr> <td>2,8</td> <td>0,35</td> <td>weiß</td> <td>blau</td> <td>grau</td> </tr> <tr> <td colspan="2"></td> <td></td> <td></td> <td></td> </tr> </table>						WE	TM	DIN	d_2	s_2	A 20406		A 22406	A 24206	2,8	0,35	weiß	blau	grau					
		WE	TM	DIN																					
d_2	s_2	A 20406	A 22406	A 24206																					
2,8	0,35	weiß	blau	grau																					

Cord end - sleeves 0,75 mm² K



		material	insulation		
		E-Cu, gal. Sn	PA	0,084 / 1000	500
		l_1	l_2	d_1	s_1
in mm:		12,0	6,0	1,2	0,15
		WE	TM	DIN	
d_2	s_2	A 20406	A 22406	A 24206	
2,8	0,35	white	blue	grey	

date: 09.07.2014