


## Aderendhülsen für Leiter mit verstärkter Isolation 1,5 mm<sup>2</sup> N

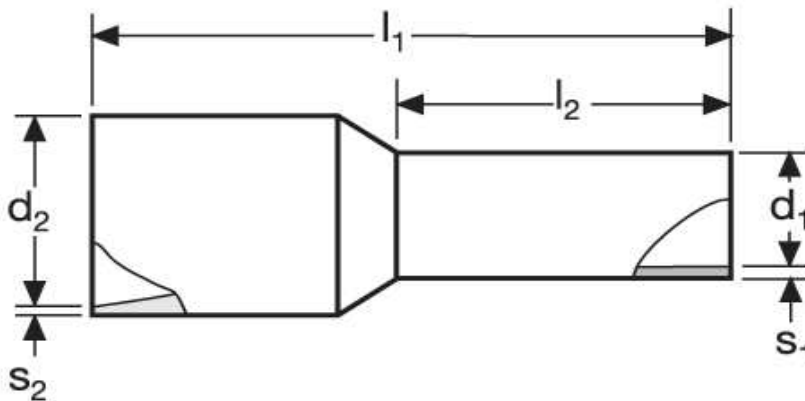


Material	Isolation		
E-Cu, gal. Sn	PP	0,125 / 1000	500

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	14,0	8	1,8	0,15

		WE	TM	DIN
$d_2$	$s_2$	A 20608-GB	A 22608-GB	A 24408-GB
3,8	0,3	rot 	schwarz 	schwarz 

Stand: 09.07.2014

**Cord end - sleeves**  
for tri-rated cables  
1,5 mm<sup>2</sup> N

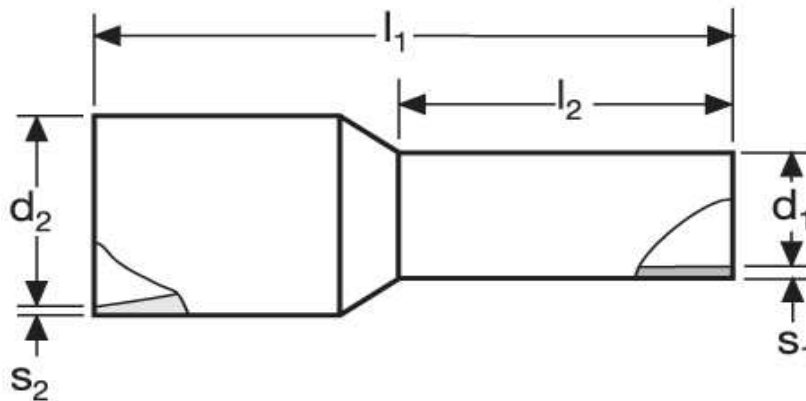

material	insulation		
E-Cu, gal. Sn	PP	0,125 / 1000	500

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	14,0	8	1,8	0,15

	$d_2$	$s_2$	WE	TM	DIN
	3,8	0,3	A 20608-GB	A 22608-GB	A 24408-GB
			red 	black 	black 

date: 09.07.2014