


Aderendhülsen für kurzschluss sichere Leitungen 1,5 mm² N

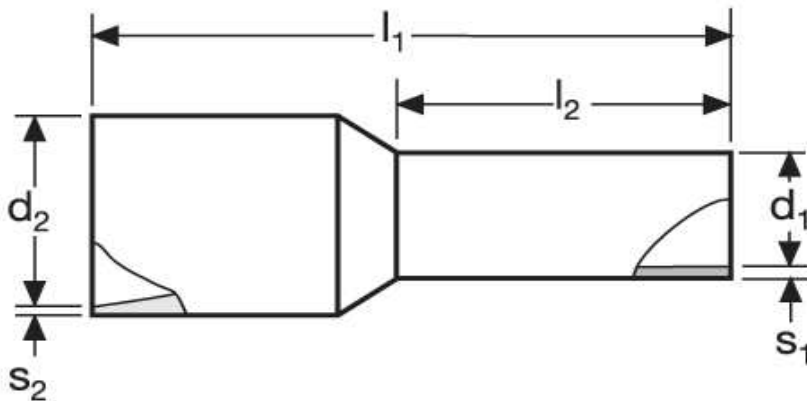


| Material | Isolation | | |
|---------------|-----------|--------------|-----|
| E-Cu, gal. Sn | PA | 0,239 / 1000 | 100 |

| | l_1 | l_2 | d_1 | s_1 |
|--------|-------|-------|-------|-------|
| in mm: | 17,4 | 8 | 1,8 | 0,15 |

| | | WE | TM | DIN |
|-------|-------|------------|-------------|-------------|
| d_2 | s_2 | A 20608-SI | A 22608-SI | A 24408-SI |
| 6,8 | 0,6 | rot | schwarz | schwarz |

Stand: 09.07.2014

Cord end - sleeves
for short-circuit resistant conductors
1,5 mm² N

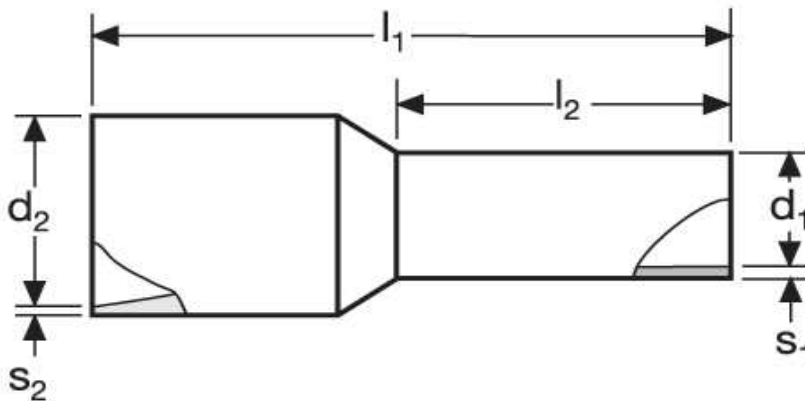

| material | insulation | | |
|---------------|------------|--------------|-----|
| E-Cu, gal. Sn | PA | 0,239 / 1000 | 100 |

| | l_1 | l_2 | d_1 | s_1 |
|--------|-------|-------|-------|-------|
| in mm: | 17,4 | 8 | 1,8 | 0,15 |

| | | WE | TM | DIN |
|-------|-------|------------|------------|------------|
| d_2 | s_2 | A 20608-SI | A 22608-SI | A 24408-SI |
| 6,8 | 0,6 | red | black | black |

date: 09.07.2014