


## Aderendhülsen 0,25 mm<sup>2</sup> L

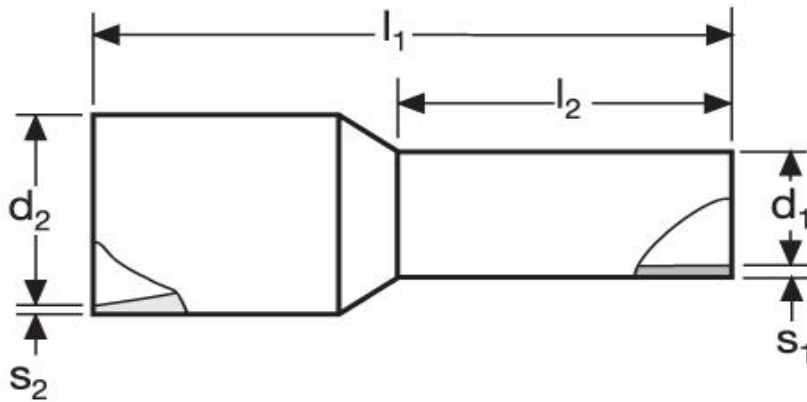


	Material	Isolation			
	E-Cu, gal. Sn	PP	0,051 / 1000	500	
	$l_1$	$l_2$	$d_1$	$s_1$	
in mm:	12,0	8,0	0,75	0,15	
	$d_2$	$s_2$	WE	TM	DIN
	1,8	0,25	A 20108M	A 22108M	A 20118M
			hellblau	gelb	violett

Stand: 10.01.2019

## Cord end - sleeves

0,25 mm<sup>2</sup> L

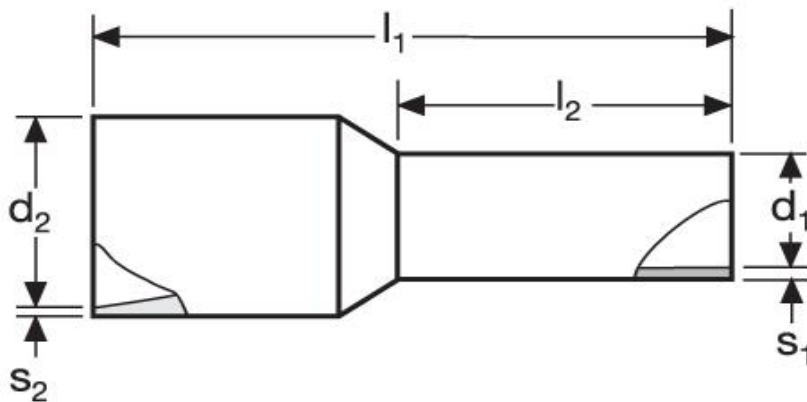

		material	insulation	$\frac{\text{g}}{\text{cm}^3}$	
		E-Cu, gal. Sn	PP	0,051 / 1000	500
		$l_1$	$l_2$	$d_1$	$s_1$
in mm:		12,0	8,0	0,75	0,15
		WE	TM	DIN	
$d_2$	$s_2$	A 20108M	A 22108M	A 20118M	
1,8	0,25	light-blue	yellow	violet	

date: 10.01.2019