
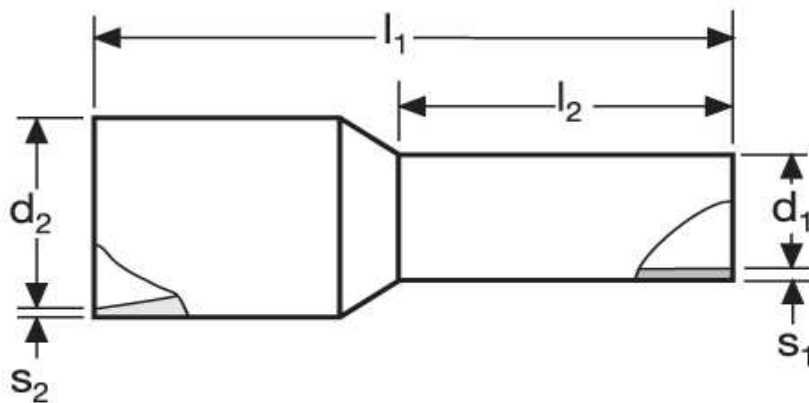


Aderendhülsen für Leiter mit verstärkter Isolation 0,5 mm² N





Material	Isolation		
E-Cu, gal. Sn	PP	0,078 / 1000	500

	l_1	l_2	d_1	s_1
in mm:	13,5	8	1,1	0,15

	d_2	s_2	WE	TM	DIN
	3,0	0,25	A 20308-GB orange 	A 22308-GB weiß 	A 24108-GB weiß

Stand: 11.07.2014

Cord end - sleeves
for tri-rated cables
0,5 mm² N

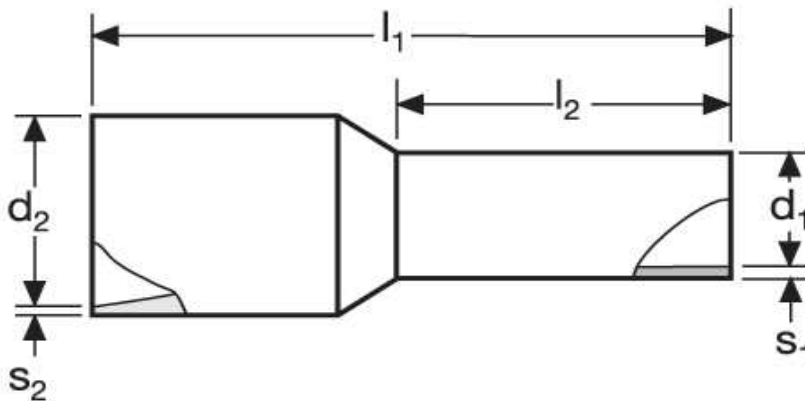

material	insulation		
E-Cu, gal. Sn	PP	0,078 / 1000	500

	l_1	l_2	d_1	s_1
in mm:	13,5	8	1,1	0,15

		WE	TM	DIN
d_2	s_2	A 20308-GB	A 22308-GB	A 24108-GB
3,0	0,25	orange 	white 	white

date: 11.07.2014