
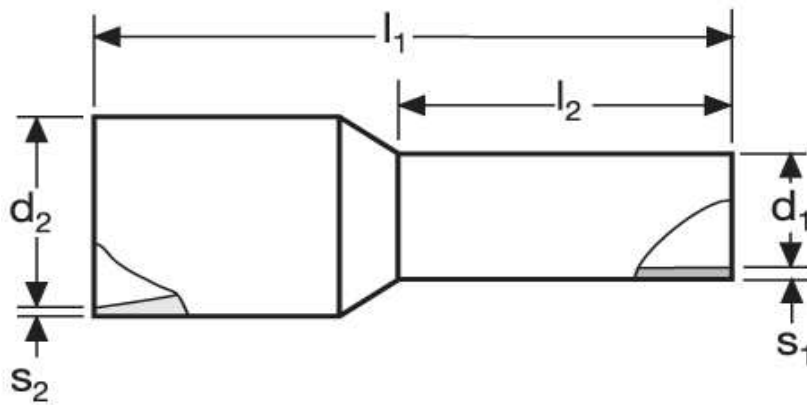


## Aderendhülsen 2,5 mm<sup>2</sup> HL





| Material      | Isolation |              |     |
|---------------|-----------|--------------|-----|
| E-Cu, gal. Sn | PA        | 0,219 / 1000 | 500 |

|        | $l_1$ | $l_2$ | $d_1$ | $s_1$ |
|--------|-------|-------|-------|-------|
| in mm: | 18,0  | 12    | 2,2   | 0,15  |

|       |       | WE       | TM       | DIN      |
|-------|-------|----------|----------|----------|
| $d_2$ | $s_2$ | A 20712  | A 22712  | A 24512  |
| 4,2   | 0,3   | blau<br> | grau<br> | blau<br> |

Stand: 17.07.2014

## Cord end - sleeves 2,5 mm<sup>2</sup> HL

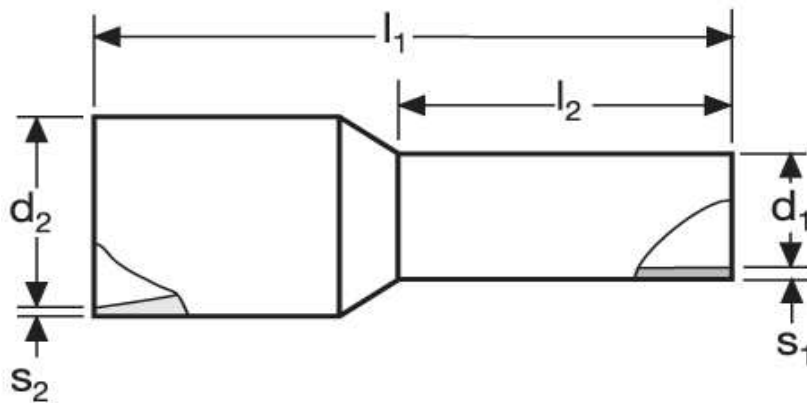

|                |                | material       | insulation     |                |                |
|----------------|----------------|----------------|----------------|----------------|----------------|
|                |                | E-Cu, gal. Sn  | PA             | 0,219 / 1000   | 500            |
|                |                | l <sub>1</sub> | l <sub>2</sub> | d <sub>1</sub> | s <sub>1</sub> |
| in mm:         |                | 18,0           | 12             | 2,2            | 0,15           |
|                |                | WE             | TM             | DIN            |                |
| d <sub>2</sub> | s <sub>2</sub> | A 20712        | A 22712        | A 24512        |                |
| 4,2            | 0,3            | blue           | grey           | blue           |                |
|                |                |                |                |                |                |

date: 17.07.2014