


## Aderendhülsen 0,75 mm<sup>2</sup> K

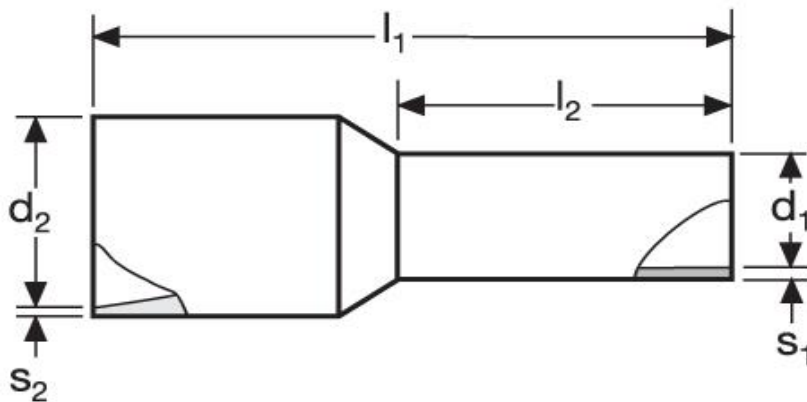


	Material	Isolation		
	E-Cu, gal. Sn	PP	0,084 / 1000	500
	l <sub>1</sub>	l <sub>2</sub>	d <sub>1</sub>	s <sub>1</sub>
in mm:	12,0	6,0	1,2	0,15
	WE	TM	DIN	
d <sub>2</sub>	A 20406M	A 22406M	A 24206M	
s <sub>2</sub>	weiß	blau	grau	
2,8				
0,25				

Stand: 10.01.2019

## Cord end - sleeves

0,75 mm<sup>2</sup> K

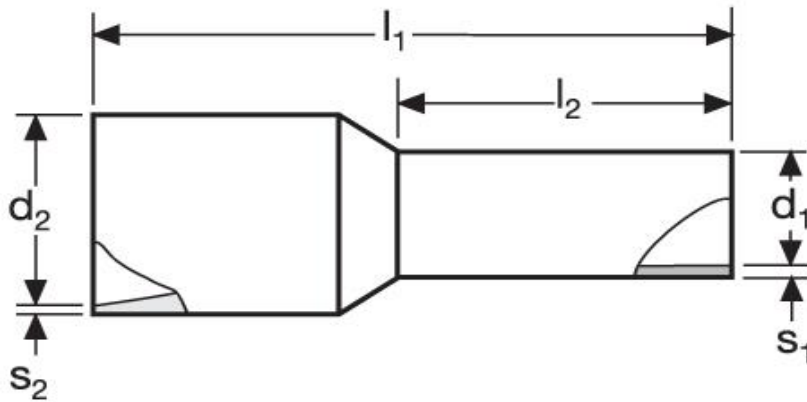

material	insulation		
E-Cu, gal. Sn	PP	0,084 / 1000	500

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	12,0	6,0	1,2	0,15

	$d_2$	$s_2$	WE	TM	DIN
	2,8	0,25	A 20406M	A 22406M	A 24206M
			white	blue	grey

date: 10.01.2019