
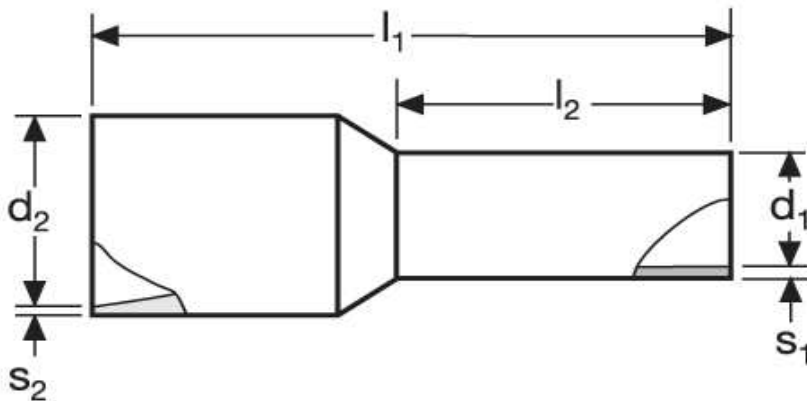


## Aderendhülsen

für Leiter mit verstärkter Isolation  
0,75 mm<sup>2</sup> N





Material	Isolation		
E-Cu, gal. Sn	PP	0,094 / 1000	500

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	14,0	8	1,3	0,15

	$d_2$	$s_2$	WE	TM	DIN
	3,4	0,3	A 20408-GB	A 22408-GB	A 24208-GB
			weiß	blau	grau

Stand: 31.07.2014

## Cord end - sleeves for tri-rated cables 0,75 mm<sup>2</sup> N

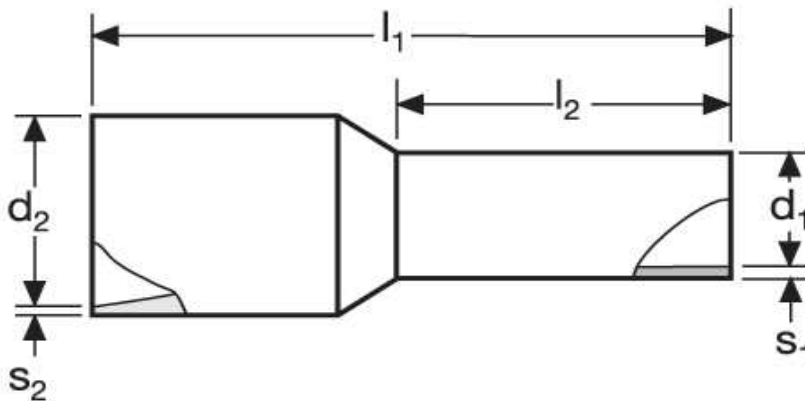

material	insulation		
E-Cu, gal. Sn	PP	0,094 / 1000	500

	$l_1$	$l_2$	$d_1$	$s_1$
in mm:	14,0	8	1,3	0,15

		WE	TM	DIN
$d_2$	$s_2$	A 20408-GB	A 22408-GB	A 24208-GB
3,4	0,3	white 	blue 	grey 

date: 31.07.2014