





Stoßverbinder
mit Schrumpfschlauchisolation
aus Polyolefin mit Innenkleber
1,5 mm² - rot



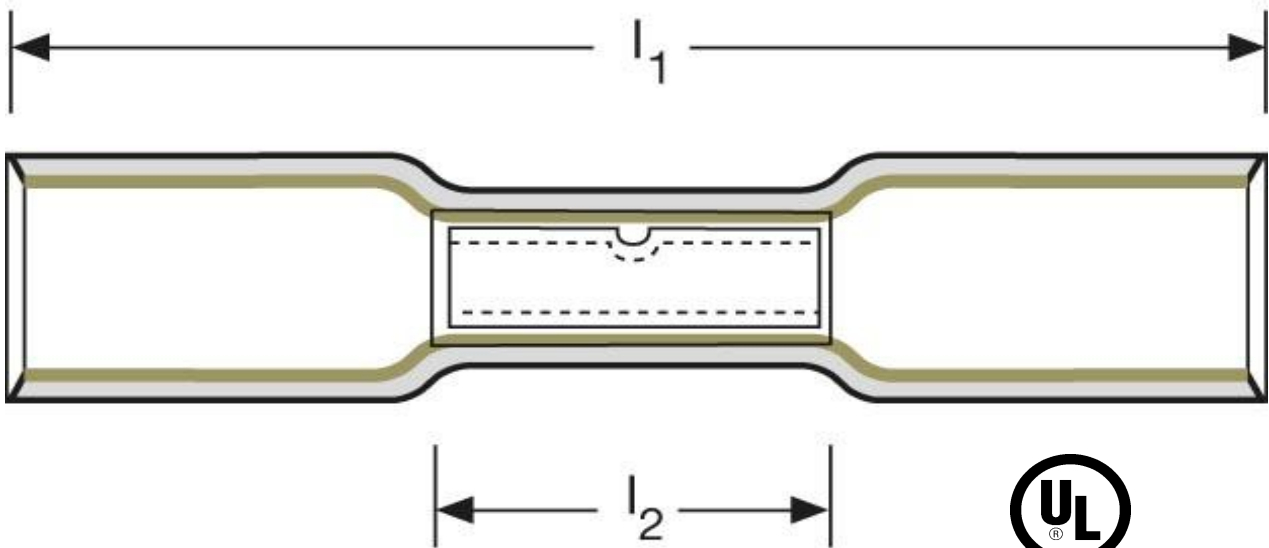

Art.Nr.	Werkstoff		
K 410010 HS	Cu galv. Sn	1,1/1000	500
	l₁	l₂	s
in mm:	36,0	15,0	0,80
Schrumpftemperatur	Durchschlagsfestigkeit		
125°C	14 kV / mm		

Stand: 08.01.2015

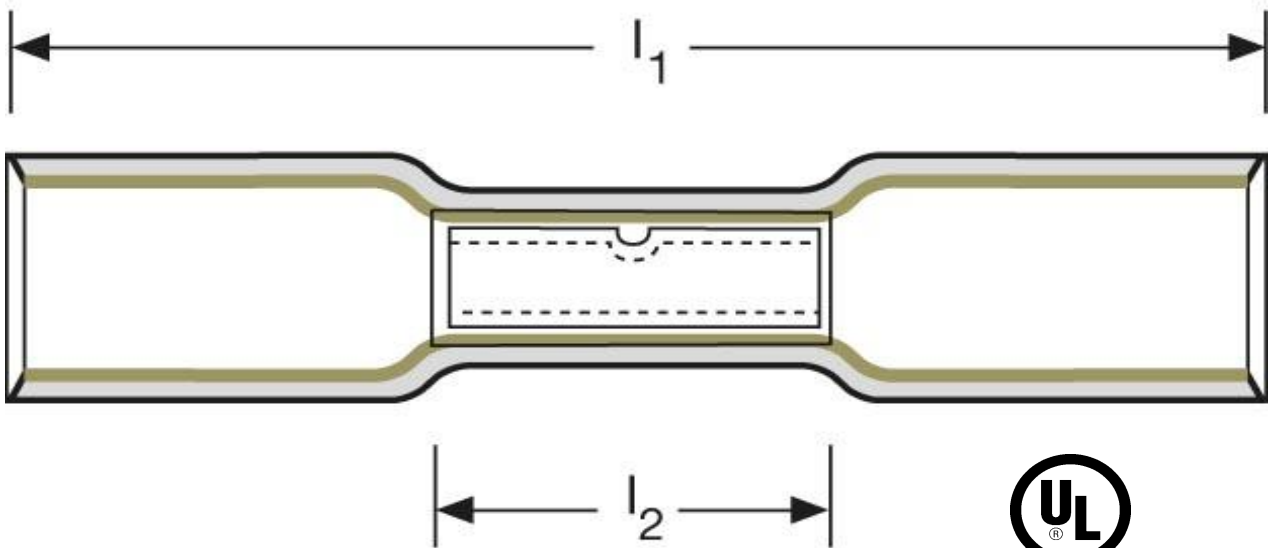Butt - connectors
with shrinking tube insulation
made of polyolefine with inner adhesive
1,5 mm² - red



part no.	material		
K 410010 HS	Cu gal. Sn	1,1/1000	500
	l₁	l₂	s
in mm:	36,0	15,0	0,8
shrinking temperature	dielectric strength		
125°C	14 kV / mm		

date: 08.01.2015