



Stoßverbinder
mit Schrumpfschlauchisolation
aus Polyolefin mit Innenkleber
2,5 mm² - blau



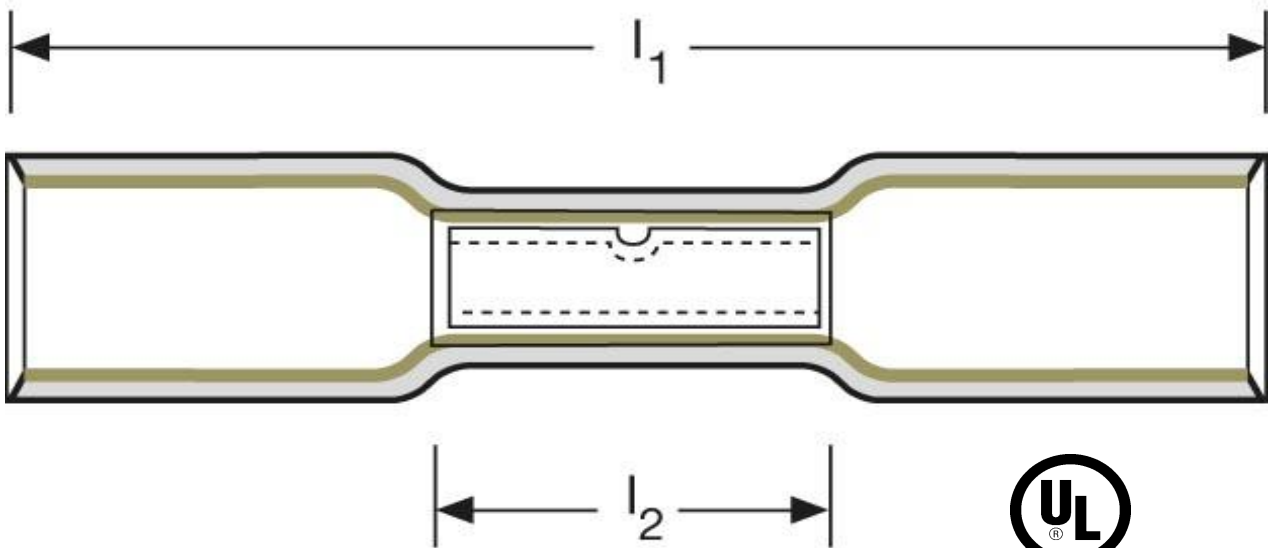

Art.Nr.	Werkstoff		
K 410020 HS	Cu galv. Sn	1,4/1000	500
	l₁	l₂	s
in mm:	36,0	15,0	0,90
Schrumpftemperatur	Durchschlagsfestigkeit		
125°C	14 kV / mm		

Stand: 08.01.2015

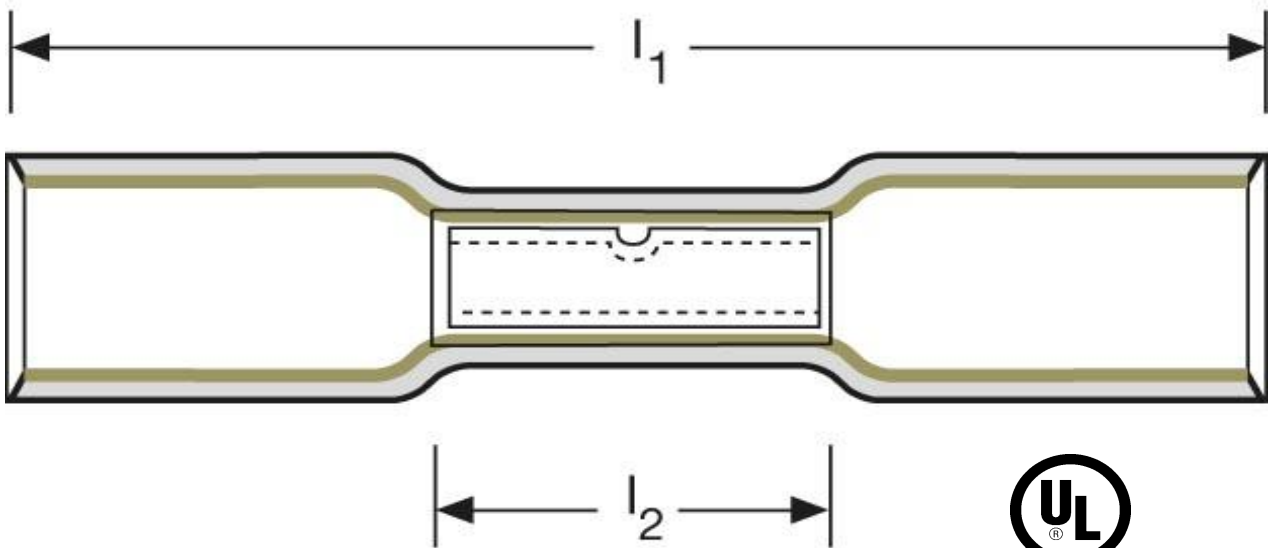Butt - connectors
with shrinking tube insulation
made of polyolefine with inner adhesive
2,5 mm² - blue



LISTED
E328883

part no.	material		
K 410020 HS	Cu gal. Sn	1,4/1000	500
	l₁	l₂	s
in mm:	36,0	15,0	0,9
shrinking temperature	dielectric strength		
125°C	14 kV / mm		

date: 08.01.2015