



**Stoßverbinder**  
mit Schrumpfschlauchisolation  
aus Polyolefin mit Innenkleber  
6 mm<sup>2</sup> - gelb



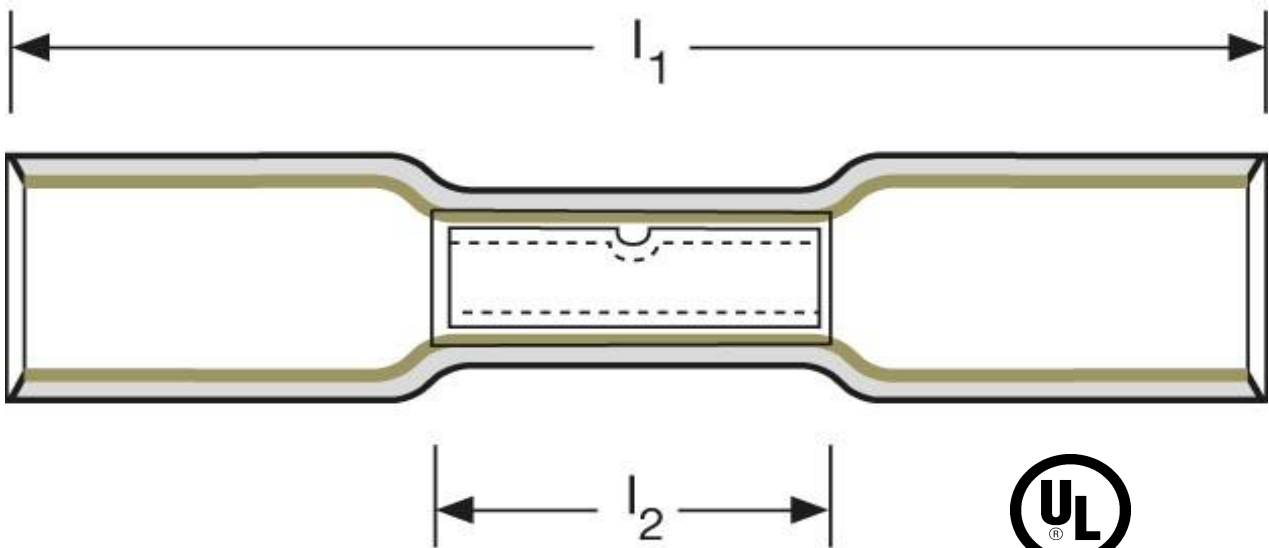

<b>Art.Nr.</b>	<b>Werkstoff</b>		
K 410060 HS	Cu galv. Sn	2,3/1000	500
	<b>l<sub>1</sub></b>	<b>l<sub>2</sub></b>	<b>s</b>
<b>in mm:</b>	41,0	15,0	1,0
<b>Schrumpftemperatur</b>	<b>Durchschlagsfestigkeit</b>		
125°C	14 kV / mm		

Stand: 08.01.2015

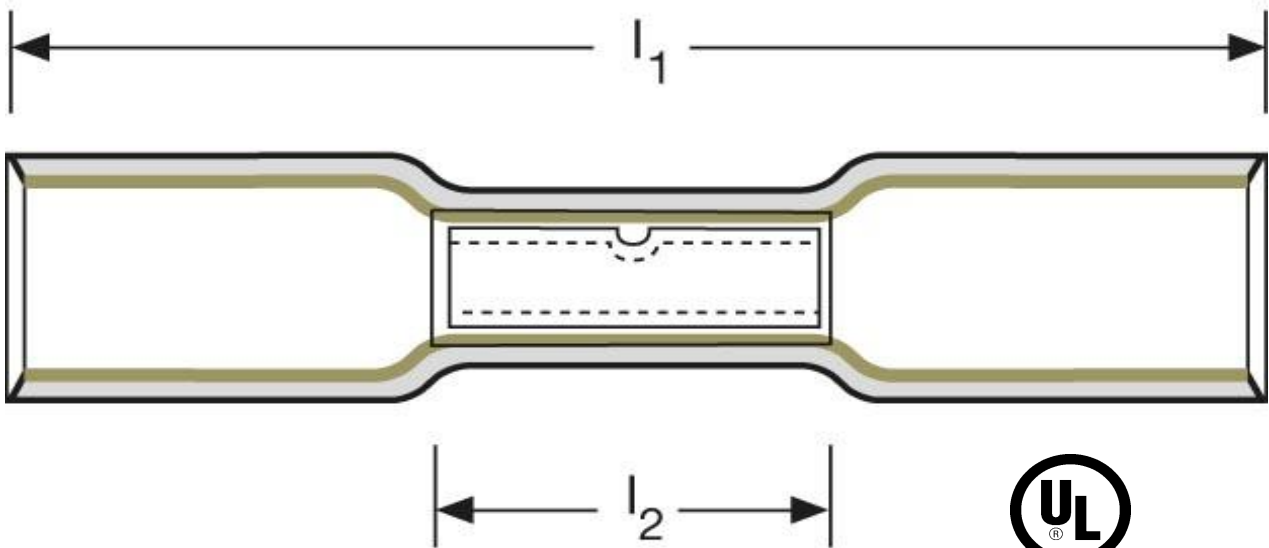**Butt - connectors**  
with shrinking tube insulation  
made of polyolefine with inner adhesive  
6 mm<sup>2</sup> - gelb



<b>part no.</b>	<b>material</b>		
K 410060 HS	Cu gal. Sn	2,3/1000	500
	<b>l<sub>1</sub></b>	<b>l<sub>2</sub></b>	<b>s</b>
<b>in mm:</b>	41,0	15,0	1,0
<b>shrinking temperature</b>		<b>dielectric strength</b>	
125°C		14 kV / mm	

date: 08.01.2015