



**Rundsteckhülse vollisoliert**  
1,5 mm<sup>2</sup> - 4 mm

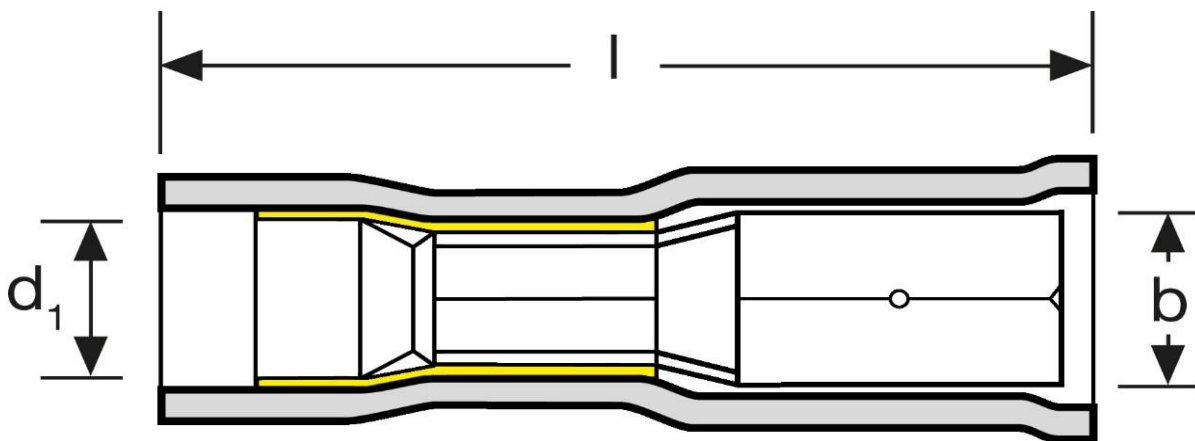


Art.Nr.	Werkstoff	Isolation	
K 420010D	Ms, E-Cu gal. Sn	PVC	1.000


	l	b	s	d <sub>1</sub>
in mm:	25	4,65	0,4	4,3

Entflammbarkeitsklasse	Temperaturbereich
UL 94 V-0	-30°C bis +70°C

Stand: 09.01.2017

**Bullet female fully insulated**  
1,5 mm<sup>2</sup> - 4 mm

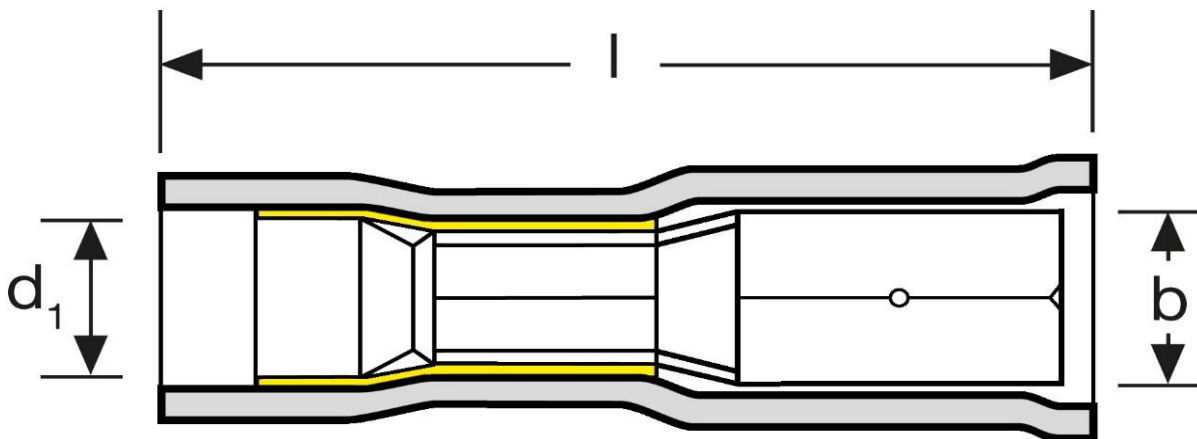

part no.	material	insulation	
K 420010D	Ms, E-Cu gal. Sn	PVC	1.000

	l	b	s	d <sub>1</sub>
in mm:	25	4,65	0,4	4,3

flammability rating	temperature range
UL 94 V-0	-30°C up to +70°C

date: 09.01.2017