



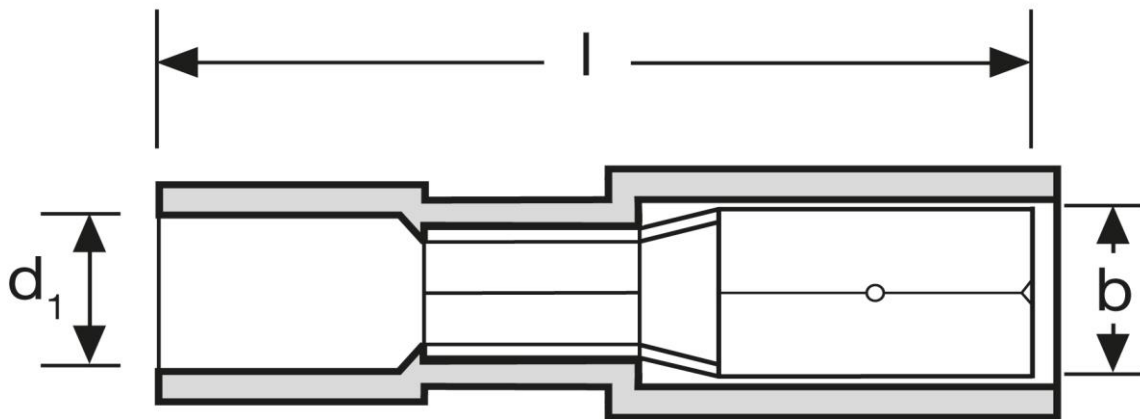
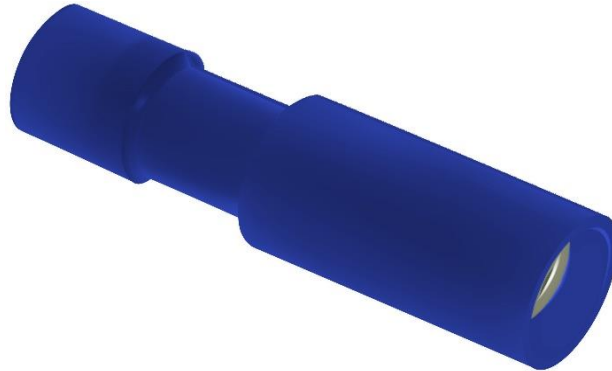
Rundsteckhülse vollisoliert
2,5 mm² - 4 mm

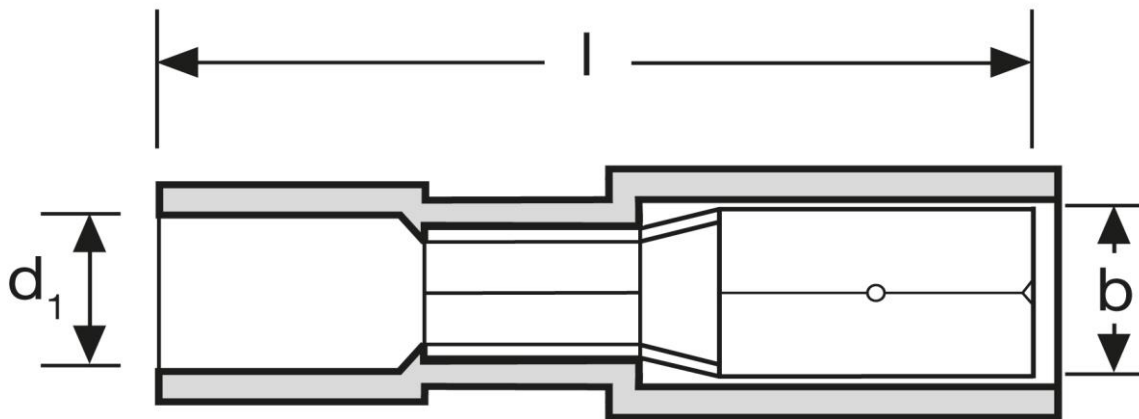


Art.Nr.	Werkstoff	Isolation		
K 421020I	Ms. gal. Sn	PA 66	1.000	
	l	b	s	d₁
in mm:	24	4,65	0,4	5,0
	Entflammbarkeitsklasse		Temperaturbereich	
	UL 94 V-2		-40°C bis +105°C	

Stand: 22.12.2020

Bullet female fully insulated
2,5 mm² - 4 mm



part no.	material	insulation	
K 421020I	Ms. gal. Sn	PA 66	1.000

	l	b	s	d ₁
in mm:	24	4,65	0,4	5,0

flammability rating	temperature range
UL 94 V-2	-40°C up to +105°C

date: 22.12.2020