



Rundsteckhülse vollisoliert
2,5 mm² - 5 mm

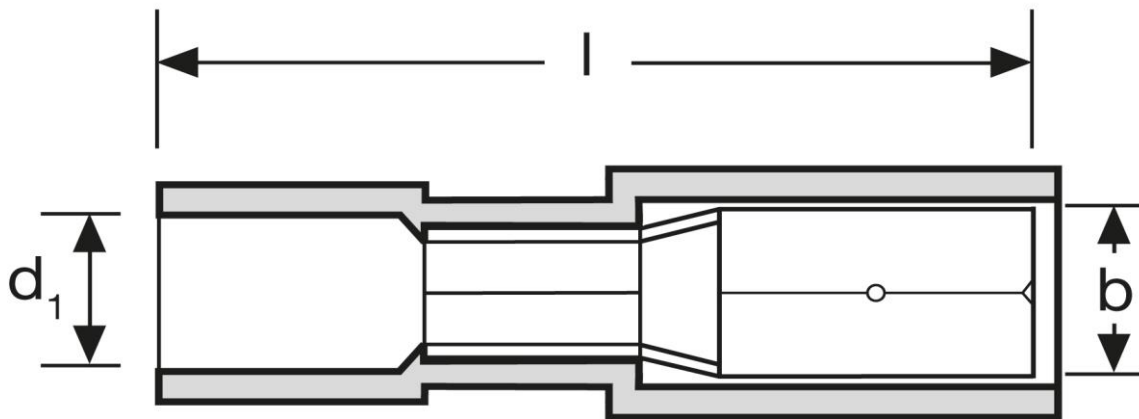


Art.Nr.	Werkstoff	Isolation	
K 421021I	Ms. gal. Sn	PA 66	1.000


	l	b	s	d ₁
in mm:	24	5,65	0,4	5,0

Entflammbarkeitsklasse	Temperaturbereich
UL 94 V-2	-40°C bis +105°C

Stand: 22.12.2020

Bullet female fully insulated
2,5 mm² - 5 mm

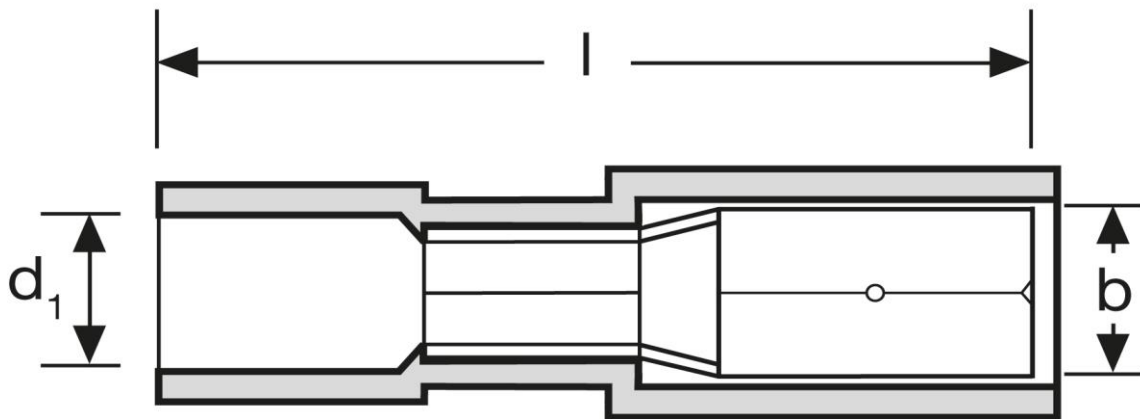

part no.	material	insulation	
K 421021I	Ms. gal. Sn	PA 66	1.000
	l	b	s
in mm:	24	5,65	0,4
	d₁		
	5,0		
	flammability rating	temperature range	
	UL 94 V-2	-40°C up to +105°C	

date: 22.12.2020