



## Rundsteckhülse vollisoliert 6 mm<sup>2</sup> - 5 mm

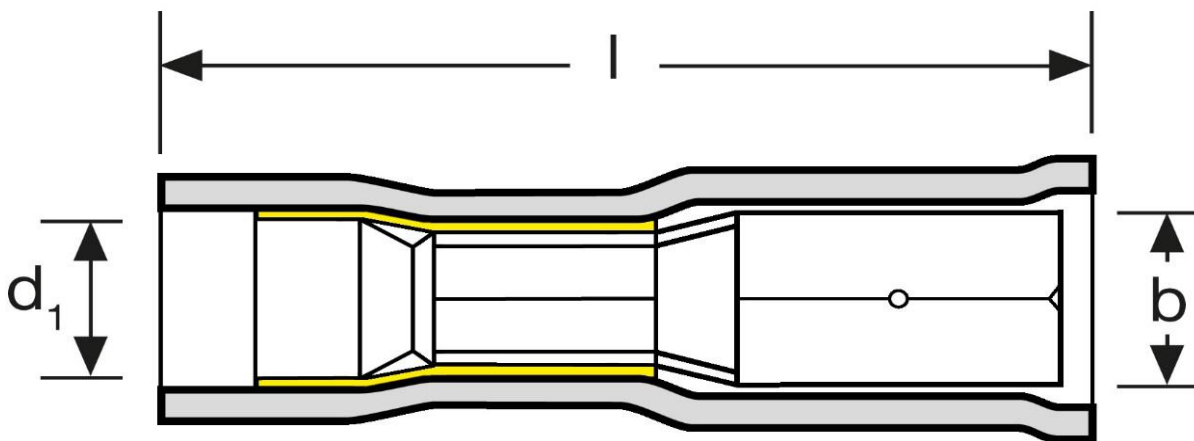



Art.Nr.	Werkstoff	Isolation	
K 422060D	Ms, E-Cu gal. Sn	PVC	500


	l	b	s	d <sub>1</sub>
in mm:	25	5,65	0,4	6,5

Entflammbarkeitsklasse	Temperaturbereich
UL 94 V-0	-30°C bis +70°C

Stand: 25.07.2018

**Bullet female fully insulated**  
6 mm<sup>2</sup> - 5 mm

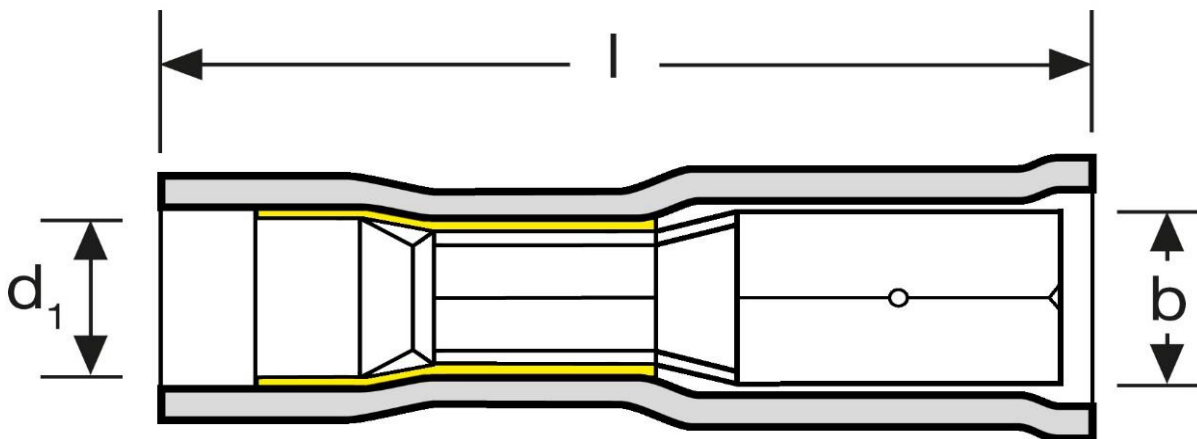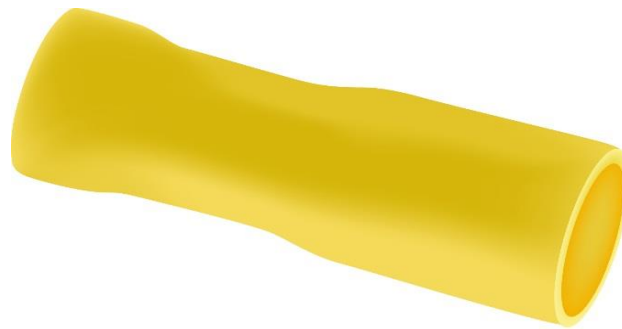

part no.	material	insulation	
K 422060D	Ms, E-Cu gal. Sn	PVC	500

	l	b	s	d <sub>1</sub>
in mm:	25	5,65	0,4	6,5

flammability rating	temperature range
UL 94 V-0	-30°C up to +70°C

date: 25.07.2018