



## Rundsteckhülse vollisoliert 6 mm<sup>2</sup> - 5 mm

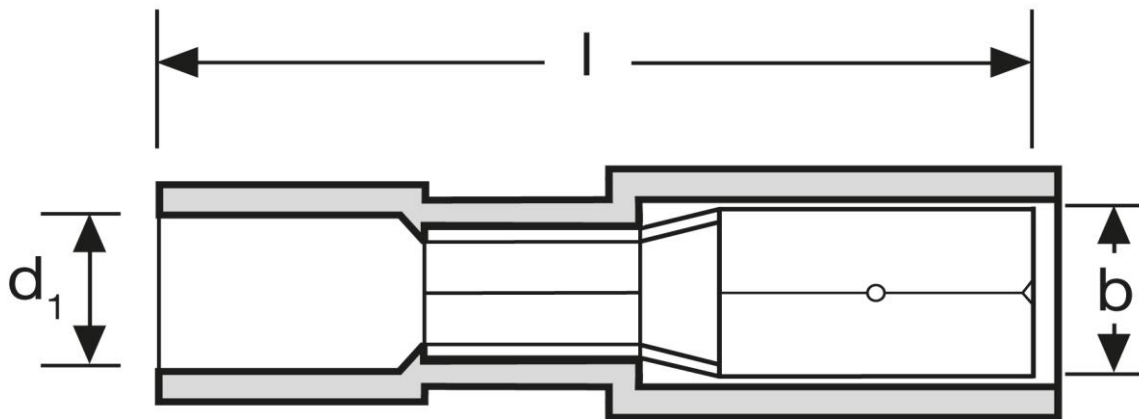



Art.Nr.	Werkstoff	Isolation	
K 422060I	Ms. gal. Sn	PA 66	500


	l	b	s	d <sub>1</sub>
in mm:	27	5,65	0,4	6,6

Entflammbarkeitsklasse	Temperaturbereich
UL 94 V-2	-40°C bis +105°C

Stand: 22.12.2020

**Bullet female fully insulated**  
6 mm<sup>2</sup> - 5 mm

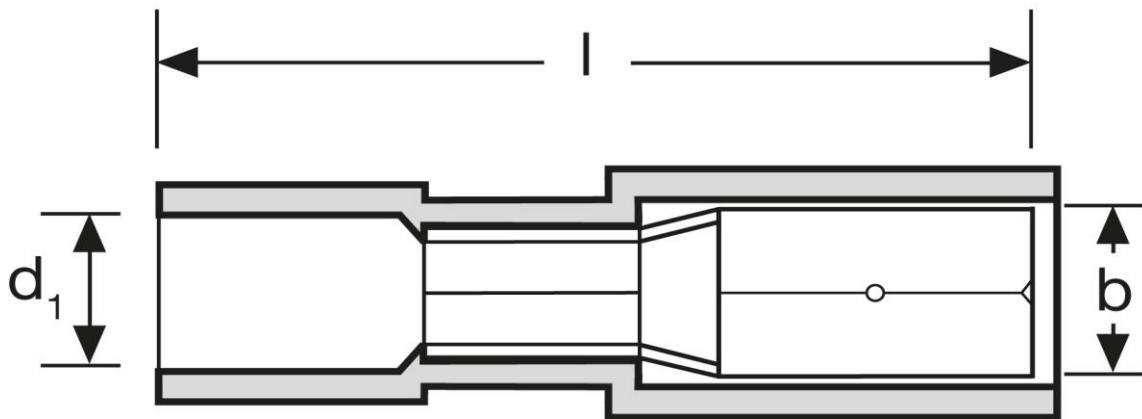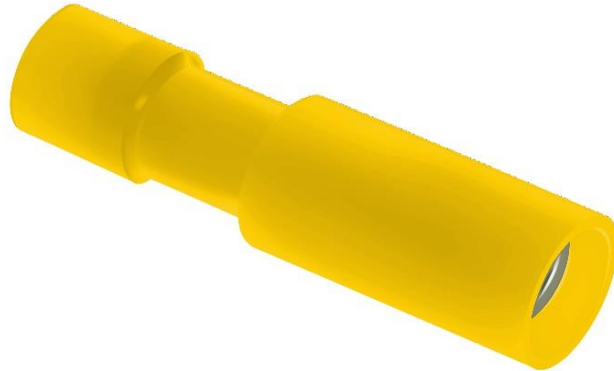

part no.	material	insulation	
K 422060I	Ms. gal. Sn	PA 66	500

	l	b	s	d <sub>1</sub>
in mm:	27	5,65	0,4	6,6

flammability rating	temperature range
UL 94 V-2	-40°C up to +105°C

date: 22.12.2020