
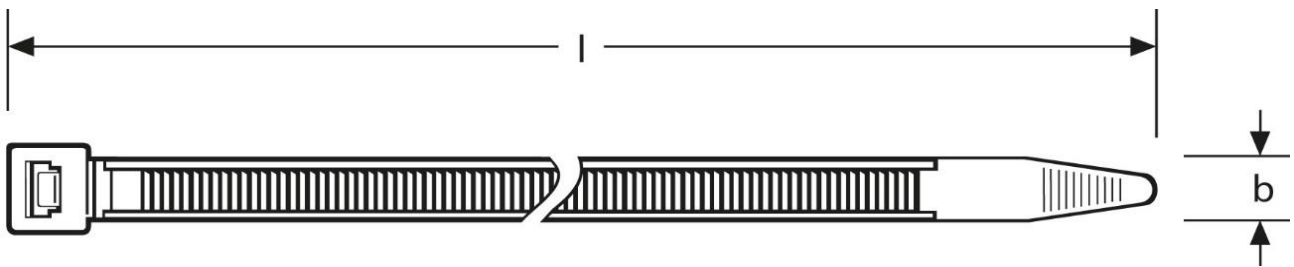



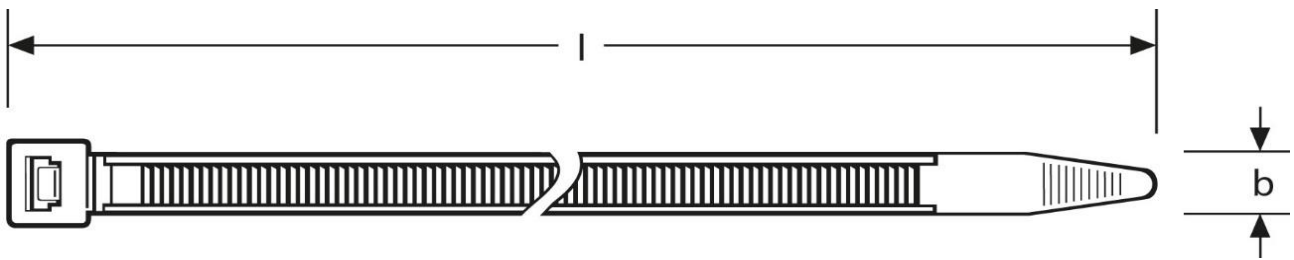
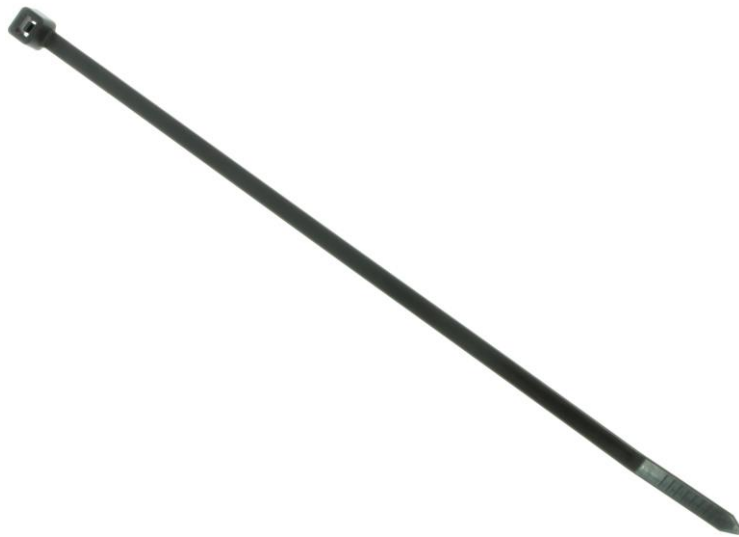
Kabelbinder 160 - 2,5 mm

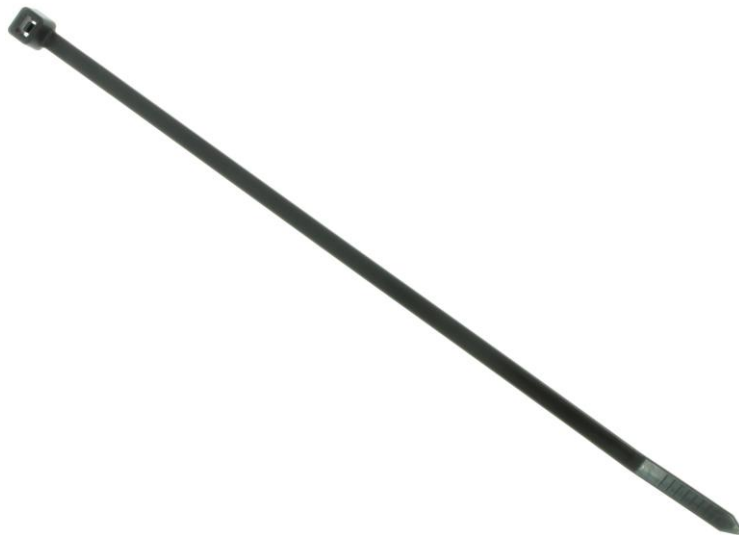


| | | | |
|----------------------------|--------------------------|----------------------|---|
| Art.Nr. | Werkstoff | Farbe |  |
| T 7004201.1 | Polyamid 66 | schwarz | 100 |
| | l | b | Kabelbaum min / max |
| in mm: | 160 | 2,5 | 1,5 / 40 |
| Entflammbarkeitskl. | Temperaturbereich | Zugfestigkeit | |
| UL 94 V-2 | -40°C bis + 85°C | 80 N | |

Stand: 02.02.2017

Cable ties
160 - 2,5 mm



| | | | |
|----------------------------|--------------------------|-------------------------|---|
| part no. | material | colour |  |
| T 7004201.1 | Polyamide 66 | black | 100 |
| | l | b | bundle diam. min /max |
| in mm: | 160 | 2,5 | 1,5 / 40 |
| flammability rating | temperature range | tensile strength | |
| UL 94 V-2 | -40°C up to + 85°C | 80 N | |

date: 02.02.2017