



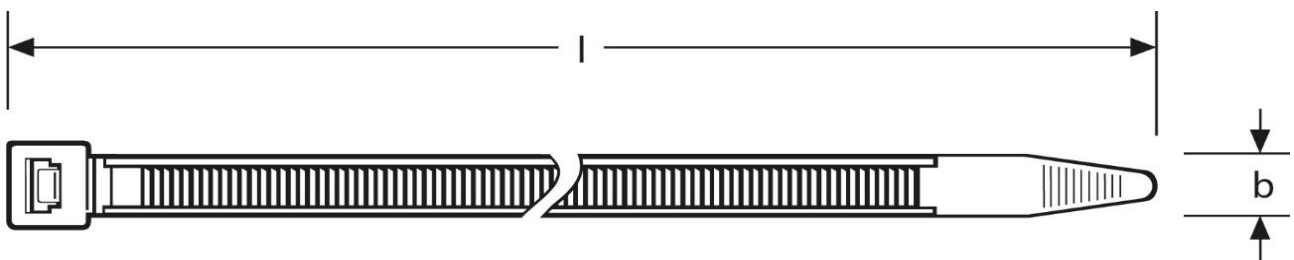
## Kabelbinder 200 - 3,6 mm

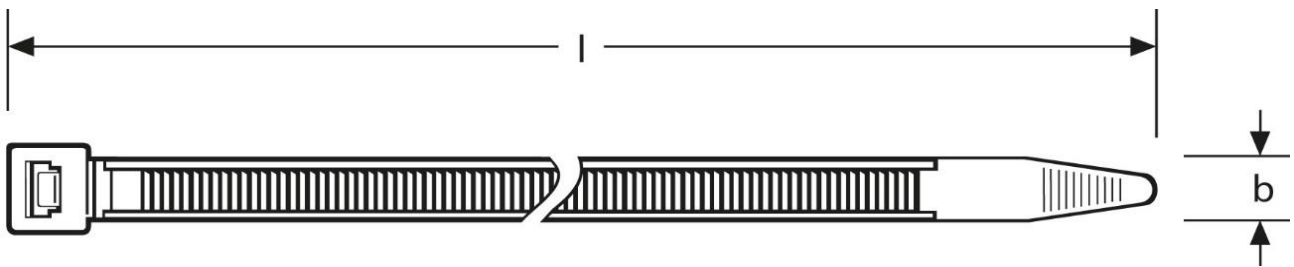


|                            |                          |                      |   |
|----------------------------|--------------------------|----------------------|---|
| <b>Art.Nr.</b>             | <b>Werkstoff</b>         | <b>Farbe</b>         |  |
| T 7008080                  | Polyamid 66              | natur                | 1.000   |
|                            | <b>l</b>                 | <b>b</b>             | <b>Kabelbaum min / max</b>  |
| <b>in mm:</b>              | 200                      | 3,6                  | 2 / 53  |
| <b>Entflammbarkeitskl.</b> | <b>Temperaturbereich</b> | <b>Zugfestigkeit</b> |   |
| UL 94 V-2                  | -40°C bis + 85°C         | 178 N                |   |

Stand: 03.02.2017

**Cable ties**  
 200 - 3,6 mm



|                            |                          |                         |   |
|----------------------------|--------------------------|-------------------------|---|
| <b>part no.</b>            | <b>material</b>          | <b>colour</b>           |  |
| T 7008080                  | Polyamide 66             | natural                 | 1.000   |
|                            | <b>l</b>                 | <b>b</b>                | <b>bundle diam. min /max</b>  |
| <b>in mm:</b>              | 200                      | 3,6                     | 2 / 53  |
| <b>flammability rating</b> | <b>temperature range</b> | <b>tensile strength</b> |   |
| UL 94 V-2                  | -40°C up to + 85°C       | 178 N                   |   |

date: 03.02.2017