
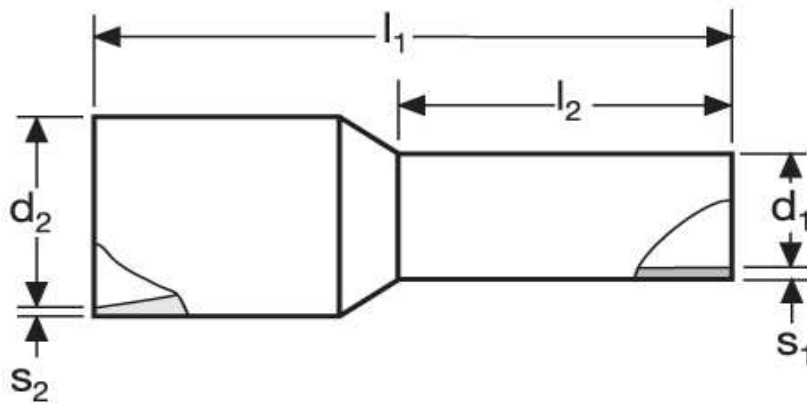




## Aderendhülsen 35 mm<sup>2</sup> HL



	Material	Isolation		
	E-Cu, gal. Sn	PA	1,690 / 1000	50
in mm:	$l_1$	$l_2$	$d_1$	$s_1$
	30,0	18	8,3	0,2
	$d_2$	$s_2$	WE	TM
	12,7	0,55	A 21318	-
			beige	
				DIN
				A 25118
				rot

Stand: 11.07.2014

## Cord end - sleeves 35 mm<sup>2</sup> HL

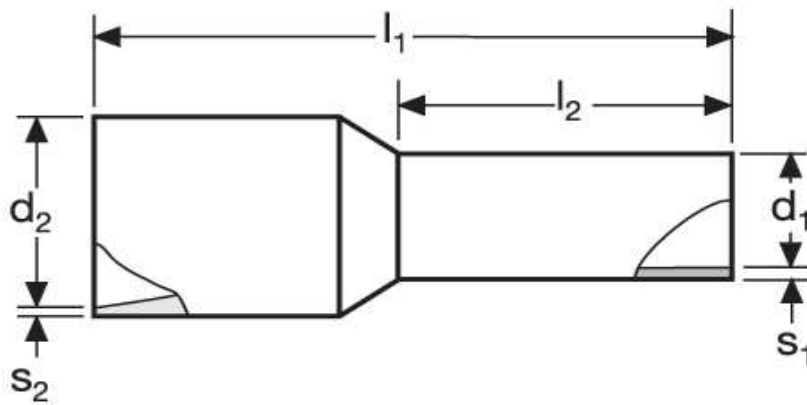

	<table border="1"> <tr> <th>material</th> <th>insulation</th> <th></th> <th></th> </tr> <tr> <td>E-Cu, gal. Sn</td> <td>PA</td> <td>1,690 / 1000</td> <td>50</td> </tr> </table>				material	insulation			E-Cu, gal. Sn	PA	1,690 / 1000	50	date: 11.07.2014			
material	insulation															
E-Cu, gal. Sn	PA	1,690 / 1000	50													
	<table border="1"> <tr> <th>l<sub>1</sub></th> <th>l<sub>2</sub></th> <th>d<sub>1</sub></th> <th>s<sub>1</sub></th> </tr> <tr> <td>30,0</td> <td>18</td> <td>8,3</td> <td>0,2</td> </tr> </table>				l <sub>1</sub>	l <sub>2</sub>	d <sub>1</sub>	s <sub>1</sub>	30,0	18	8,3	0,2				
l <sub>1</sub>	l <sub>2</sub>	d <sub>1</sub>	s <sub>1</sub>													
30,0	18	8,3	0,2													
in mm:																
	<table border="1"> <tr> <th>WE</th> <th>TM</th> <th>DIN</th> </tr> <tr> <td>A 21318</td> <td>-</td> <td>A 25118</td> </tr> <tr> <td>beige</td> <td></td> <td>red</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </table>				WE	TM	DIN	A 21318	-	A 25118	beige		red			
WE	TM	DIN														
A 21318	-	A 25118														
beige		red														
	<table border="1"> <tr> <th>d<sub>2</sub></th> <th>s<sub>2</sub></th> </tr> <tr> <td>12,7</td> <td>0,55</td> </tr> </table>				d <sub>2</sub>	s <sub>2</sub>	12,7	0,55								
d <sub>2</sub>	s <sub>2</sub>															
12,7	0,55															