



Werkzeugnis



Produkt: Kleinkabelschuh, Gabelform
Oberfläche: galv. verzinkt: 3 - 5 µm
Artikel-Nr.: K 380030 – K 386080
Werkstoff: Cu-ETP Rohr gemäß EN 13600
Bemerkung: RoHS-konform (EU-Richtlinie 2002/95/EC)

Eisenacher
Qualitätsmanagement

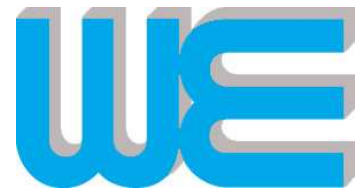

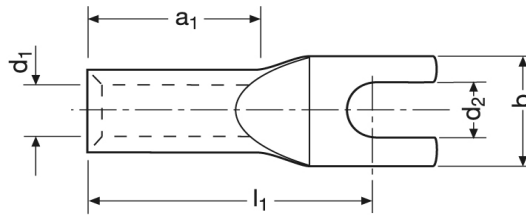

Kleinkabelschuhe

mm ²	AWG	Nenn- größe	Artikel- Nummer	Abmessung (mm)					~kg 1000 St.	VE
				d2	d1	db	l1	a1		
0,75	18	3 - 0,75	K 380030	3,2	1,3	6,0	12,0	6,0	0,68	100
		4 - 0,75	K 380040	4,3	1,3	6,5	13,0	6,0	0,74	100
		5 - 0,75	K 380050	5,3	1,3	7,5	14,0	6,0	0,82	100
1,5	15	3 - 1,5	K 381030	3,2	1,8	6,5	12,0	6,0	1,19	100
		4 - 1,5	K 381040	4,3	1,8	6,5	13,0	6,0	1,29	100
		5 - 1,5	K 381050	5,3	1,8	7,5	14,0	6,0	1,40	100
		6 - 1,5	K 381060	6,5	1,8	9,0	16,0	6,0	1,46	100
2,5	13	4 - 2,5	K 382040	3,2	2,3	7,5	12,0	6,0	1,56	100
		5 - 2,5	K 382050	4,3	2,3	7,5	13,0	6,0	1,65	100
		6 - 2,5	K 382060	5,3	2,3	8,5	14,0	6,0	1,77	100
		8 - 2,5	K 382080	6,5	2,3	9,5	16,0	6,0	2,18	100
4	11	4 - 4,0	K 383040	4,3	3,0	8,5	17,0	8,0	2,10	100
		5 - 4,0	K 383050	5,3	3,0	9,0	17,0	8,0	2,25	100
		6 - 4,0	K 383060	6,5	3,0	10,0	19,0	8,0	2,34	100
		8 - 4,0	K 383080	8,5	3,0	13,0	22,0	8,0	2,43	100
6	9	4 - 6,0	K 384040	4,3	4,0	9,5	18,0	9,0	2,50	100
		5 - 6,0	K 384050	5,3	4,0	9,5	19,0	9,0	2,70	100
		6 - 6,0	K 384060	6,5	4,0	10,0	19,0	9,0	2,80	100
		8 - 6,0	K 384080	8,5	4,0	14,0	22,0	9,0	3,22	100
10	7	5 - 10	K 385050	5,5	4,5	12,0	22,0	10,0	2,70	100
		6 - 10	K 385060	6,5	4,5	12,0	22,0	10,0	2,80	100
		8 - 10	K 385080	8,5	4,5	15,0	25,0	10,0	3,30	100
16	5	5 - 16	K 386050	5,5	5,5	12,0	26,0	13,0	3,50	100
		6 - 16	K 386060	6,5	5,5	12,0	27,0	13,0	3,60	100
		8 - 16	K 386080	8,5	5,5	15,0	29,0	13,0	4,30	100