


# Werkzeugnis



Produkt: Pressverbinder  
Oberfläche: - galv. verzinkt: 3 - 5 µm  
- wahlweise blank  
Artikel-Nr.: K 3132006 – K 3133000  
Norm: DIN 46267 Teil 1  
Werkstoff: Cu-ETP Rohr gemäß EN 13600  
Bemerkung: RoHS-konform (EU-Richtlinie 2002/95/EC)

Eisenacher  
Qualitätsmanagement



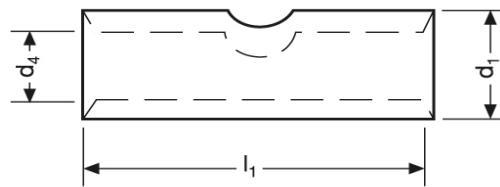

Pressverbinder

mm <sup>2</sup>	Artikel- Nummer	Abmessung (mm)			Kenn- ziffer	~kg 1000 St.	VE
		d1	d4	l1*			
6	K 3132006	5,5	3,8	30,0	5	3,1	100
10	K 3132010	6,0	4,5	30,0	6	3,5	100
16	K 3132016	8,5	5,5	50,0	8	14,5	100
25	K 3132025	10,0	7,5	50,0	10	17,7	100
35	K 3132035	12,5	8,2	50,0	12	29,0	100
50	K 3132050	14,5	10,0	56,0	14	42,6	50
70	K 3132070	16,5	11,5	56,0	16	54,1	50
95	K 3132095	19,0	13,5	70,0	18	86,5	50
120	K 3132120	21,0	15,5	70,0	20	97,0	50
150	K 3132150	23,5	17,0	80,0	22	145,0	50
185	K 3132185	25,5	19,0	85,0	25	170,0	25
240	K 3132240	29,0	21,5	90,0	28	235,0	25
300	K 3132300	32,0	24,5	100,0	32	292,3	25
400	K 3132400	38,5	27,5	150,0	38	753,2	10
500	K 3132500	42,0	31,0	160,0	42	791,0	5
625	K 3132625	44,0	34,5	160,0	44	894,0	5
800	K 3132800	52,0	40,0	200,0	52	1512,0	3
1000	K 3133000	58,0	44,0	200,0	58	1985,0	3

\* Toleranzen gemäß DIN 46267